



event™

WITH LEAK FREE DualSeal™

Schebler
CHIMNEY SYSTEMS

Put an end to costly call backs...

Condensate leaking from boiler venting systems costs contractors and building owners like you thousands of dollars a year. Call backs to reseal the system and repair water damage erode margins and customer satisfaction.

Schebler's eVent™ DualSeal™ with RapidLock™ Connection System is the solution you've been looking for. And it comes with the **industry's only leak free guarantee.**

Install it and forget it. Schebler has you covered.



Assured.

Three year leak free guarantee

- Flange to flange, factory-applied gasket with inner collar design delivers maximum sealing surface; superior to male to female connection systems
- No sealant required for entire system (including variable length sections) for immediate appliance start up
- Industry's highest pressure rating of 40" WC; testing verification of ability to hold pressure/condensate

Proven.

- UL 1738-listed and labeled utilizing an AL 29-4C® or 316L stainless steel liner
- **Listed by UL, NOT just tested to UL 1738 standards**, meeting all requirements
- Fulfills all appliance manufacturers' venting specifications
- Complete compliance streamlines submittal process



Efficient.

Robust construction reduces labor costs up to 30%

- One-third fewer supports and hangers, reducing installation costs
- Constructed with 24 gauge material
- Fully welded inner and outer liners
- Easy, quick joint connection using RapidLock v-bands



Taking value to the highest levels


...with a better joint design.

Most leaking issues can be attributed to two things – a poorly designed gasketed male to female joint connection and construction utilizing light gauge material – both in an effort to provide a low cost product. Products with gasketed male to female connections and light gauge material can't obtain the dimension tolerance required to consistently seal condensate inside the vent – resulting in low positive pressure ratings.




Cross Section of Special Gas Venting System

eVent DualSeal's flange to flange with inner collar, factory-applied gasket design with RapidLock Connection System – plus 24 gauge stainless steel construction – overcomes the engineering defect in standard joint connections. **See for yourself.**

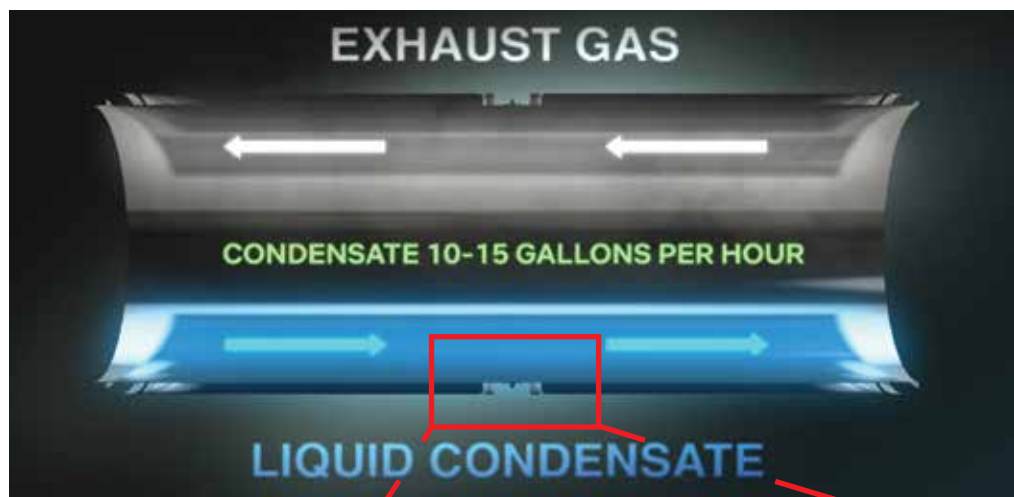

Close up of industry standard male to female joint connection

Exhaust gas with highly corrosive condensate can be forced past the gasket if fit-up is even slightly imperfect, potentially causing significant water damage to the facility.

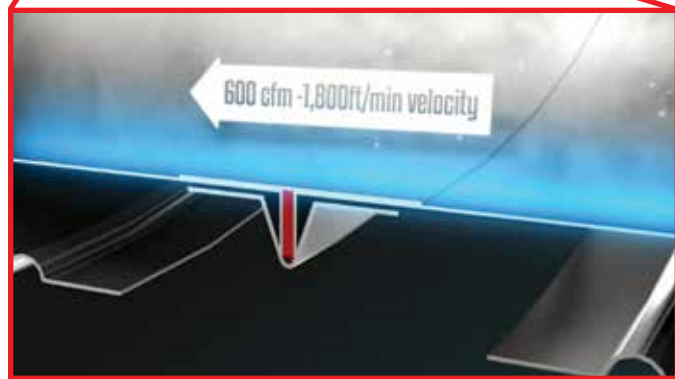

Close up of eVent DualSeal connection

Exhaust gas with condensate flows over the gaskets, creating a perfect, leak free seal, eliminating costly call backs.

Rely on Schebler Chimney for complete system designs.

Grease Duct Systems – UL 2221 classified products, zero-clearance to combustibles, two-hour fire-rated

Generator Exhaust Systems – UL 103-listed products listed for 1400° continuous operation, positive pressure rated for 60" WC

Boiler Flue Systems – UL 103 and UL 2561-listed products for safe and proper boiler performance

Engineered Stacks – designed to ASTM STS-1-2000, SMACNA guidelines and standard engineering practices

Reasons to choose Schebler Chimney products include:

- Proudly made with Union labor
- Meet *Buy American* requirements
- Delivered with product warranties

To purchase or schedule a demonstration of the eVent™ DualSeal™ with **RapidLock™** Connection System, call 563.359.0110 or visit scheblerchimney.com/find-a-distributor/ to speak with a Schebler Distributor today.



P 800.391.0009 • 563.359.0110
5665 FENNO RD. • BETTENDORF, IA 52722
WWW.SCHEBLERCHIMNEY.COM



eVent DualSeal, patent pending.
© 2019 Schebler Chimney Systems. All Rights Reserved.
AL 29-4C is a registered trademark of Allegheny Ludlum Corporation.

AD&M - 1219



Grease Duct



Generator Exhaust



Boiler Flue



Engineered Stack