



Model CPRP2

**ZERO-LEAK PRODUCTS FOR
EXHAUST APPLICATIONS**

DELIVERING THE CERTAINTY
OF UL LISTED VENTING
WITH 2" OF INSULATION



MODEL CPRP2

ZERO-LEAK PRODUCTS FOR EXHAUST APPLICATIONS

OUR CPR SERIES EXHAUST SYSTEMS PROVIDE INDUSTRIAL VENTILATION CERTAINTY AND SAFETY.

Part of our UL listed CPR Series, Model CPRP2 is designed and built with 2" of insulation between the liner and the shell for use in venting appliances. Each CPR system product takes into account code compliance, structural design and load requirements to provide the most dependable solution where safety is critical, such as medical facilities and data centers.

LISTING

The Schebler Model CPRP2 chimney and exhaust system is listed by Underwriters Laboratories Inc. (UL) under file number MH17739 in the United States and Canada for the following uses. It also has the Underwriters Laboratories mark for Canada (cUL).

UL 103

A 1,400°F chimney, a 1,000°F Building Heating Appliance Chimney for positive pressures to 60" WC for high-temperature applications.

UL 2561

A 1,400°F Building Heating Appliance Chimney for positive pressures to 60" WC intended for venting flue gases at a temperature not exceeding 1,400°F under continuous operating conditions, from building-heating appliances and other low-heat appliances.

The system is also approved by the New York City Department of Buildings for use in New York City. MEA # 227-94-M.

SYSTEM CONCEPT

The Model CPRP2 is a modular, double-wall, prefabricated exhaust system with 2" of insulation for use in venting appliances that require a positive, neutral or negative draft exhaust system. Sections are provided in lightweight, easy-to-handle lengths and connected with the Critical Pressure Rated (CPR) joint connection specifically designed to ensure a leak-free system under positive or negative pressure. All sections are joined together and sealed utilizing a pressure and liquid tight high-temperature gasket between the flanges. This factory supplied gasket means that no sealant is required on any connection for a consistent and dependable installation. Straight sections, expansion joints, tees, elbows and support devices are offered, allowing a complete exhaust system to be assembled using standard components.

SURROUNDINGS

Model CPRP2 chimneys are suitable for use with Building Heating Appliances and other low-heat appliances as described in the Chimney Selection chart of the National Fire Protection Association Standard Number 211, which produce flue exhaust gases not exceeding 1,400°F under continuous operation or 1,800°F under intermittent operation. These chimneys are to be installed as required for metal chimneys. They are not to be enclosed within combustible construction. An unenclosed chimney may be placed adjacent to walls of combustible construction at the clearances specified.

COMPLETE LINE OF FITTINGS AND SIZES AVAILABLE

The Model CPRP2 chimney system is available in even and odd diameters, ranging from 5" to 48". A complete line of straight sections, expansion joints, tees, elbows, rain caps, roof penetration components and support members is available. In addition to the standard components, virtually any conceivable fitting is available as a special-order item.

MATERIAL THICKNESS

The standard 304 stainless steel inner shell thickness is 0.036" for 5" to 36" diameter systems and 0.048" for 38" to 48" diameter systems. Standard 430 stainless steel outer shell thickness is 0.028" for 5" to 36" diameter systems and 0.048" for 38" to 48" diameter systems.

MATERIAL AVAILABLE

The Model CPRP2 is available in a variety of materials, allowing the proper material selection for your specific application. The standard product features a 304 stainless steel liner and a 430 stainless steel outer shell. For greater corrosion resistance, 316 stainless steel is available for the liner and 304 or 316 stainless steel for the outer shell.

For most applications, the standard 304 stainless steel inner and 430 stainless steel outer material selection is sufficient. For boilers firing oils heavier than No. 2 fuel oil, use 316 stainless steel for the inner shell.

SUPPORT LIMITS

Support plates and wall supports are utilized to support the weight of the chimney and to provide a fixed point to allow proper operation of expansion joints. In horizontal runs, supports should be placed adjacent to fittings not otherwise supported. See the individual part description for allowable support charts.

TESTS PERFORMED

The Model CPRP2 has endured rigorous tests by Underwriters Laboratories. Just a few of the tests performed are:

STRUCTURAL TESTS

The support plates and wall supports have been physically tested to carry a load four times the amount allowed by our listing.

WIND LOAD TESTS

Loads equivalent to 110 mph wind have been applied to the chimney with acceptable results.

SKIN TEMPERATURE RISE TESTS

The chimney has been subjected to a series of burn tests at temperatures up to 1,800°F. The purpose of these tests is to determine safe clearances from the chimney wall to combustible materials.

RAIN TESTS

The rain caps have been tested to ensure an unsatisfactory amount of water does not enter the rain cap.

SCHEBLER VALUE

FAST PROJECT COMPLETION

- Trouble-free installations/detailed instructions
- No on-site welding

MAXIMUM STRENGTH/LONG LIFE

- Unmatched dimensional accuracy for secure joint connections
- Fully welded liners and shells
- Unequalled support limits

COMPLETE SYSTEM DESIGN

- CAD drawings
- 3D design solutions
- Complete BOM
- System sizing

SPECIAL FITTINGS

- Customized components are available to meet the needs of your specific project

OPERATING TEMPERATURES AND CLEARANCES CHART

The Model CPRP2 has been tested and listed for continuous use at both 1,000°F and 1,400°F at the following clearances to combustible materials. The clearances shown are from the shell to combustibles.

CPRP2 CLEARANCE TO COMBUSTIBLES		
Section Inside Diameter	1,000°F (560°C) Chimney*	1,400°F (760°C) Chimney
5"-6"	1/2" (13mm)	1/2" (13mm)
7"-10"	1" (25mm)	1" (25mm)
11"-14"	2" (51mm)	2" (51mm)
15"-18"	3" (76mm)	3" (76mm)
19"-24"	4" (102mm)	4" (102mm)
25"-28"	5" (127mm)	5" (127mm)
29"-32"	6" (152mm)	6" (152mm)
33"-36"	7" (178mm)	7" (178mm)
37"-40"	8" (203mm)	8" (203mm)
41"-48"	9" (229mm)	9" (229mm)

*Building Heating Appliance Chimney

*Clearance to non-combustible materials for all diameters and applications is 1" (25mm).

PART NUMBERS

All standard parts manufactured by Schebler are identified by a part number, which describes their makeup and function.

The part numbers are made up as follows:

1. The first series is the model designation: CPRP2, CPRP2A, CPRP4 or CPRSW.
2. This is followed by the part name. For example, 47S, 90T or CC.
3. Next is the part's internal diameter in inches, such as 06, 12 or 24.
4. Last is the liner/shell material designation.

For example, the part number for an 8" ID, Model CPRP2, 47" long straight section with a 304 stainless steel liner and 430 stainless steel shell is CPRP2-47S-08N.

CODE	LINER / SHELL MATERIAL
A	304 / Aluminized
B	316 / Aluminized
C	304 / 304 or all 304
D	304 / 316
E	316 / 316 or all 316
F	Galvanized
G	Aluminized
H	Painted Carbon Steel
N	304 / 430
P	316 / 430
Q	430
S	316 / 304

LEAK-FREE CONNECTION

The Schebler Chimney Critical Pressure Rated (CPR) joint connection is specifically designed to ensure a leak-free system under positive or negative pressure. This connection utilizes a high temperature gasket between a 1/2" rolled lip and secured with 7-gauge A36 bolt flange. The CPR zero leakage capability allows high velocity airflow which greatly reduces duct size, saving installed space.

JOINT ASSEMBLY


1. Clean flanges and inner side of bolt flange with mineral spirits in order to remove any oil or dirt residue.
2. Apply the provided patterned CPR gasket to the bolt flange.
3. Join the two flanged ends of the sections.
4. Install the provided hardware to join the bolt flanges together, tightening the bolts in a star pattern at torque specifications of 12 lb./ft.
5. Install the provided insulation strip or sections over the bolt flange ensuring that there are no gaps in the insulation.
6. Place the outer band over the joint, covering the space between the shells. The flanges on the outer band fit into the grooves on the shells. Align the screws from the barrel nut assembly into the clip and tighten tightly with a screwdriver.




STEP 1




STEP 2




STEP 3 CLOSE

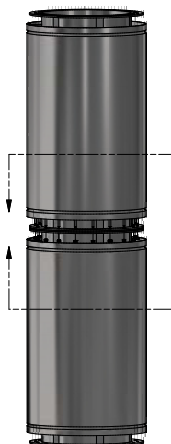


STEP 3



STEP 4 CLOSE

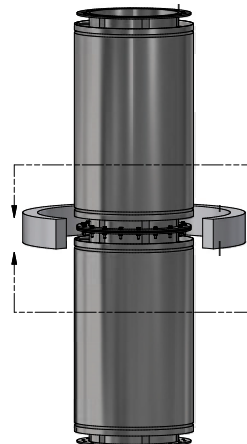


STEP 4

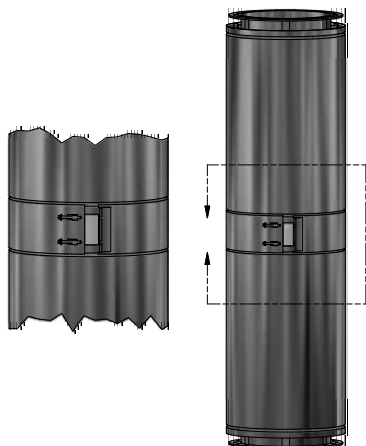


STEP 5 CLOSE



STEP 5



STEP 6 CLOSE

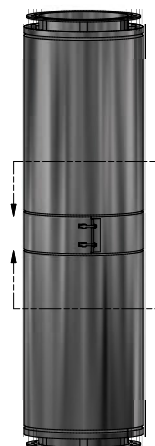

STEP 6


SYSTEM COMPONENTS

CUSTOM DIMENSIONS ARE AVAILABLE TO SUIT YOUR NEEDS IN EVEN AND ODD SIZES.

150# FLANGED ADAPTER KIT PART NO. ANAK

The 150# Flanged Adapter is used to connect a flanged appliance outlet. It is patterned to match a standard ANSI 150# bolt flange and comes welded to a 4" tube section.

Includes hardware corresponding to the bolt pattern and flange material of the adapter and two FGT gaskets and one seal ring.

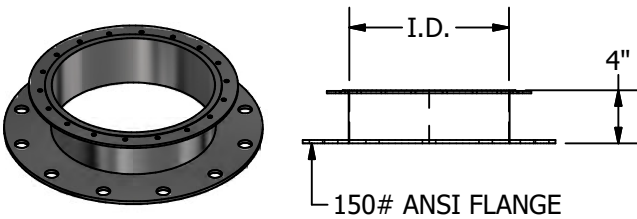


PART NO. ANAK
I.D.
6"
8"
10"
12"
14"
16"
18"
20"
22"
24"
26"
28"
30"
32"
34"
36"
38"
40"
42"
44"
46"
48"

ADAPTER KIT (FLANGED) PART NO. BKF

The Adapter Kit (Flanged) is used for securing a pipe to a flanged appliance outlet. Beam clamps are provided for the connection of the flanges, or the flange can be drilled in the field to match the appliance.

Includes hardware corresponding to the bolt pattern and flange material of the adapter and two FGT gaskets and one seal ring.

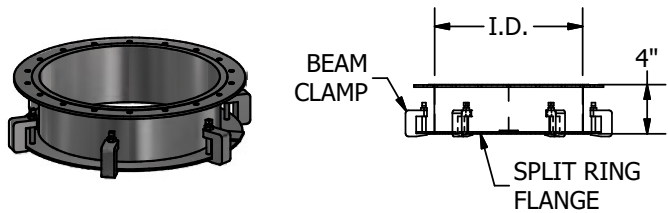

PART NO. BKF	
I.D.	CLAMPS
6"	3
8"	4
10"	5
12"	6
14"	7
16"	8
18"	9
20"	10
22"	11
24"	12
26"	13
28"	14
30"	15
32"	16
34"	17
36"	18
38"	19
40"	20
42"	21
44"	22
46"	23
48"	24

SYSTEM COMPONENTS


CUSTOM DIMENSIONS ARE AVAILABLE TO SUIT YOUR NEEDS IN EVEN AND ODD SIZES.

ADAPTER KIT (RAW)

PART NO. BKR

The Adapter Kit (Raw) is used for securing a pipe to an unflanged appliance outlet.

Includes one FGT gasket, one seal ring and hardware.

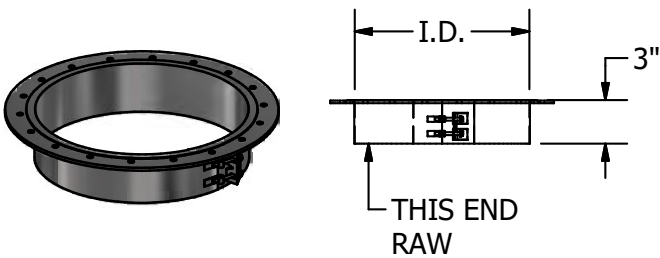


PART NO. BKR
I.D.
6"
8"
10"
12"
14"
16"
18"
20"
22"
24"
26"
28"
30"
32"
34"
36"
38"
40"
42"
44"
46"
48"

NOZZLE SECTION

PART NO. NS

The Nozzle Section includes a 1" NPT connection to be used as a test port.

Includes one FGT gasket, one outer band and hardware.

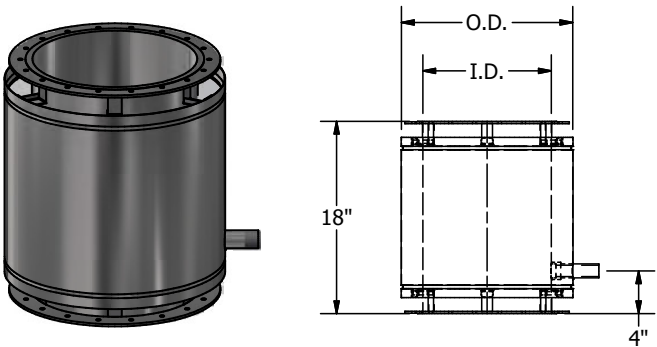

PART NO. NS	
I.D.	O.D.
6"	10"
8"	12"
10"	14"
12"	16"
14"	18"
16"	20"
18"	22"
20"	24"
22"	26"
24"	28"
26"	30"
28"	32"
30"	34"
32"	36"
34"	38"
36"	40"
38"	42"
40"	44"
42"	46"
44"	48"
46"	50"
48"	52"

SYSTEM COMPONENTS

CUSTOM DIMENSIONS ARE AVAILABLE TO SUIT YOUR NEEDS IN EVEN AND ODD SIZES.

STRAIGHT SECTION

PART NO. 18S, 29S, 47S AND 59S

Standard lengths are as follows:


Diameters 5" to 7" are 18", 29" and 47"

Diameters 8" to 24" are 18", 29", 47" and 59"

Diameters 25" to 48" are 18", 29" and 47"

Custom parts can be manufactured to any length over 8".

Includes one FGT gasket, one outer band and hardware.

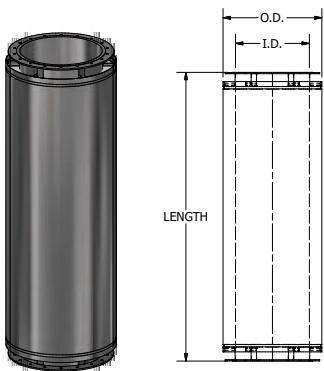

PART NO. 18S / 29S / 47S / 59S	
I.D.	O.D.
6"	10"
8"	12"
10"	14"
12"	16"
14"	18"
16"	20"
18"	22"
20"	24"
22"	26"
24"	28"
26"	30"
28"	32"
30"	34"
32"	36"
34"	38"
36"	40"
38"	42"
40"	44"
42"	46"
44"	48"
46"	50"
48"	52"


BELLOWS SECTION

PART NO. BS

The Bellows Section is designed to compensate for thermal expansion, up to 3".

This part is recommended for diesel engines and turbine exhaust systems.

Includes a liner, shell and one FGT gasket and hardware.

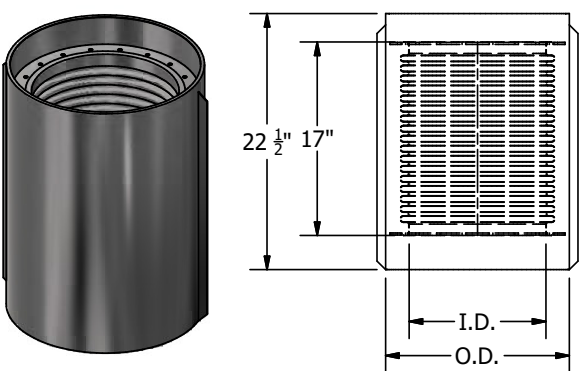

PART NO. BS	
I.D.	O.D.
6"	10"
8"	12"
10"	14"
12"	16"
14"	18"
16"	20"
18"	22"
20"	24"
22"	26"
24"	28"
26"	30"
28"	32"
30"	34"
32"	36"
34"	38"
36"	40"
38"	42"
40"	44"
42"	46"
44"	48"
46"	50"
48"	52"

SYSTEM COMPONENTS


CUSTOM DIMENSIONS ARE AVAILABLE TO SUIT YOUR NEEDS IN EVEN AND ODD SIZES.

TAPERED INCREASER

PART NO. TI

The Tapered Increaser is used when a change in pipe diameter is required.

Includes one FGT gasket and one outer band for larger and smaller openings, and hardware.

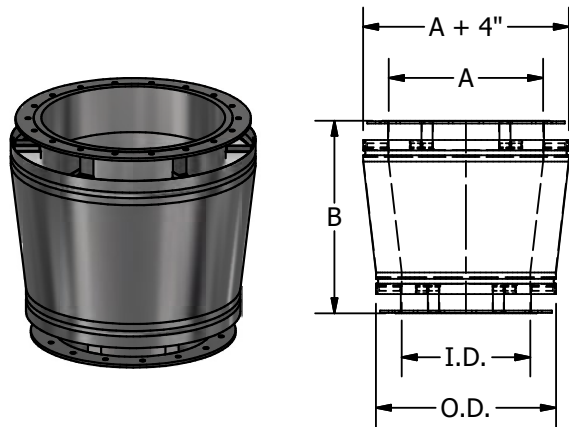


ECCENTRIC TAPERED INCREASER

PART NO. ETI

The Eccentric Tapered Increaser is used when a change in pipe diameter is required and maintains an eccentric profile when it is necessary for the pipe to be flat on one side.

Includes one FGT gasket and one outer band for larger and smaller openings, and hardware.

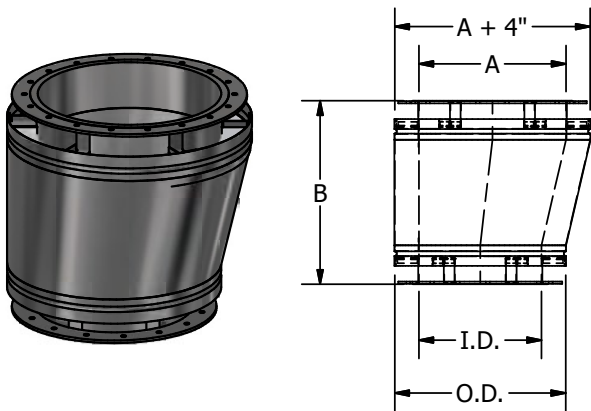

PART NO. TI / ETI								
I.D.	A	B	A	B	A	B	A	B
6"	8"	15"	10"	18"	12"	21"	14"	24"
8"	10"	15"	12"	18"	14"	21"	16"	24"
10"	12"	15"	14"	18"	16"	21"	18"	24"
12"	14"	15"	16"	18"	18"	21"	20"	24"
14"	16"	15"	18"	18"	20"	21"	22"	24"
16"	18"	15"	20"	18"	22"	21"	24"	24"
18"	20"	15"	22"	18"	24"	21"	26"	24"
20"	22"	15"	24"	18"	26"	21"	28"	24"
22"	24"	15"	26"	18"	28"	21"	30"	24"
24"	26"	15"	28"	18"	30"	21"	32"	24"
26"	28"	15"	30"	18"	32"	21"	34"	24"
28"	30"	15"	32"	18"	34"	21"	36"	24"
30"	32"	15"	34"	18"	36"	21"	38"	24"
32"	34"	15"	36"	18"	38"	21"	40"	24"
34"	36"	15"	38"	18"	40"	21"	42"	24"
36"	38"	15"	40"	18"	42"	21"	44"	24"
38"	40"	15"	42"	18"	44"	21"	46"	24"
40"	42"	15"	44"	18"	46"	21"	48"	24"
42"	44"	15"	46"	18"	48"	21"	-	-
44"	46"	15"	48"	18"	-	-	-	-
46"	48"	15"	-	-	-	-	-	-
48"	-	-	-	-	-	-	-	-

Available in odd sizes. Call for odd diameter taper increaser information.

SYSTEM COMPONENTS


CUSTOM DIMENSIONS ARE AVAILABLE TO SUIT YOUR NEEDS IN EVEN AND ODD SIZES.

45° LATERAL TEE

PART NO. 45LT

The 45° Lateral Tee is used for low flow resistance entry into a stack or breeching.

Includes two FGT gaskets, two outer bands and hardware.

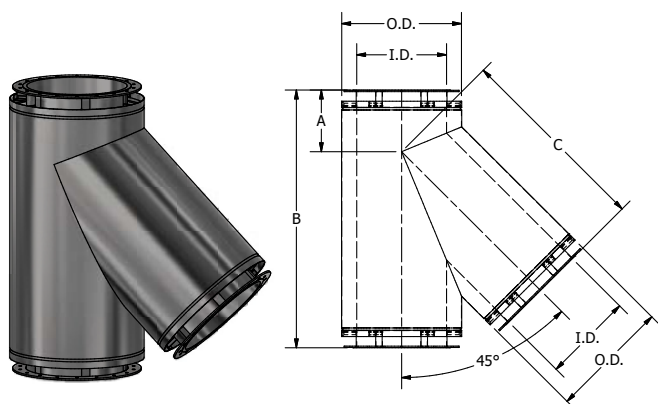


REDUCING 45° LATERAL TEE

PART NO. R45LT

The Reducing 45° Lateral Tee is used for low flow resistance entry into a stack or breeching when the stack or breeching is a larger size.

Specify the size of the branch required.

Includes one FGT gasket and one outer band for larger and smaller openings, and hardware.

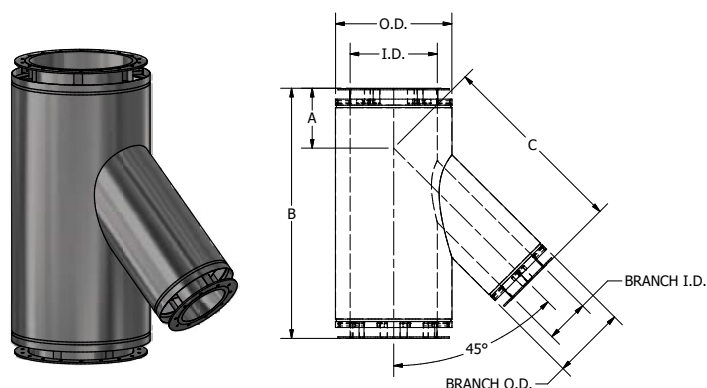

PART NO. 45LT / R45LT

I.D.	A	B	C
6"	7"	26"	19"
8"	7 3/8"	28 3/4"	21 3/8"
10"	7 3/4"	31 1/2"	23 3/4"
12"	8 1/4"	34 1/2"	26 1/4"
14"	8 5/8"	37 1/4"	28 5/8"
16"	9 1/16"	40 1/8"	31 1/16"
18"	9 1/2"	43"	33 1/2"
20"	9 7/8"	45 3/4"	35 7/8"
22"	10 5/16"	48 5/8"	38 5/16"
24"	10 3/4"	51 1/2"	40 3/4"
26"	11 1/8"	54 1/4"	43 1/8"
28"	11 9/16"	57 1/8"	45 9/16"
30"	12"	60"	48"
32"	12 3/8"	62 3/4"	50 3/8"
34"	12 3/4"	65 1/2"	52 3/4"
36"	13 3/16"	68 3/8"	55 3/16"
38"	13 5/8"	71 1/4"	57 5/8"
40"	14"	74"	60"
42"	14 7/16"	76 7/8"	62 7/16"
44"	14 7/8"	79 3/4"	64 7/8"
46"	15 1/4"	82 1/2"	67 1/4"
48"	15 11/16"	85 3/8"	69 11/16"

SYSTEM COMPONENTS


CUSTOM DIMENSIONS ARE AVAILABLE TO SUIT YOUR NEEDS IN EVEN AND ODD SIZES.

90° TEE

PART NO. 90T

The 90° Tee is used to join horizontal and vertical sections, as well as to provide for the connection of drain or inspection fittings. Use either the Drain Tee Cap or the End Cap for the closure of the unused opening.

Includes two FGT gaskets, two outer bands and hardware.

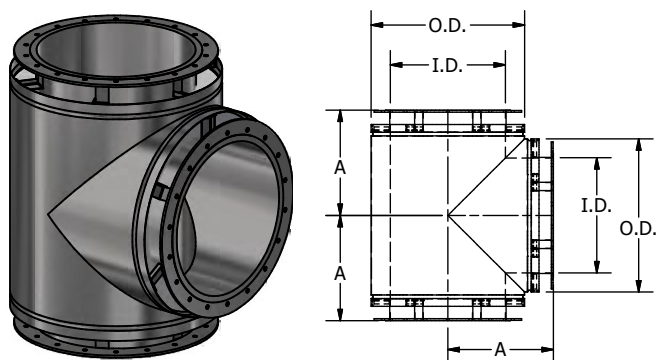


PART NO. 90T	
ID	A
6"	8"
8"	9"
10"	10"
12"	11"
14"	12"
16"	13"
18"	14"
20"	15"
22"	16"
24"	17"
26"	18"
28"	19"
30"	20"
32"	21"
34"	22"
36"	23"
38"	24"
40"	25"
42"	26"
44"	27"
46"	28"
48"	29"

ORIGINAL 90° TEE

PART NO. 090T

The Original 90° Tee is used to join horizontal and vertical sections, as well as to provide for the connection of drain or inspection fittings. Use either the Drain Tee Cap or the End Cap for the closure of the unused opening.

Includes two FGT gaskets, two outer bands and hardware.

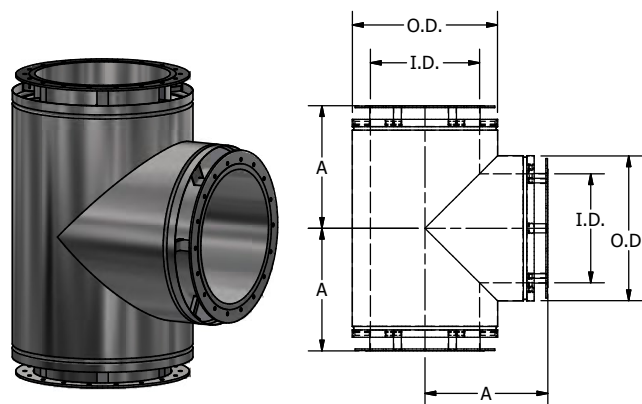

PART NO. 090T	
ID	A
6"	10 1/2"
8"	11 1/2"
10"	12 1/2"
12"	13 1/2"
14"	14 1/2"
16"	15 1/2"
18"	16 1/2"
20"	17 1/2"
22"	18 1/2"
24"	19 1/2"
26"	20 1/2"
28"	21 1/2"
30"	22 1/2"
32"	23 1/2"
34"	24 1/2"
36"	25 1/2"
38"	26 1/2"
40"	27 1/2"
42"	28 1/2"
44"	29 1/2"
46"	30 1/2"
48"	31 1/2"


SYSTEM COMPONENTS

CUSTOM DIMENSIONS ARE AVAILABLE TO SUIT YOUR NEEDS IN EVEN AND ODD SIZES.

90° LATERAL TEE PART NO. 90LT

The 90° Lateral Tee is used to join horizontal and vertical sections with lower resistance, as well as to provide for the connection of drain or inspection fittings. Use either the Drain Tee Cap or the End Cap for closure of the unused opening.

Includes two FGT gaskets, two outer bands and hardware.


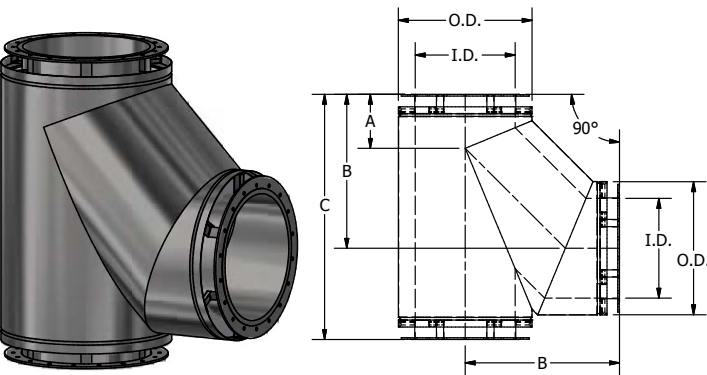


PART NO. 90LT			
MAIN ID	A	B	C
6"	5 1/4"	13 1/16"	21"
7"	5 7/16"	13 15/16"	22 7/16"
8"	5 11/16"	14 7/8"	23 7/8"
9"	5 7/8"	15 3/4"	25 1/4"
10"	6 1/16"	16 11/16"	26 11/16"
11"	6 5/16"	17 5/8"	28 1/16"
12"	6 1/2"	18 1/2"	29 1/2"
13"	6 11/16"	19 7/16"	30 15/16"
14"	6 15/16"	20 3/8"	32 5/16"
15"	7 1/8"	21 1/4"	33 3/4"
16"	7 5/16"	22 3/16"	35 3/16"
17"	7 9/16"	23 1/16"	36 9/16"
18"	7 3/4"	24"	38"
19"	7 15/16"	24 15/16"	39 3/8"
20"	8 3/16"	25 13/16"	40 13/16"
21"	8 3/8"	26 3/4"	42 1/4"
22"	8 9/16"	27 11/16"	43 5/8"
23"	8 3/4"	28 9/16"	45 1/16"
24"	9"	29 1/2"	46 1/2"

REDUCING 90° LATERAL TEE PART NO. R90LT

The Reducing 90° Lateral Tee is used to join horizontal and vertical sections of different sizes with lower resistance, as well as to provide for the connection of drain or inspection fittings. Use either the Drain Tee Cap or the End Cap for the closure of the unused opening.

Includes one FGT gasket and one outer band for larger and smaller openings, and hardware.

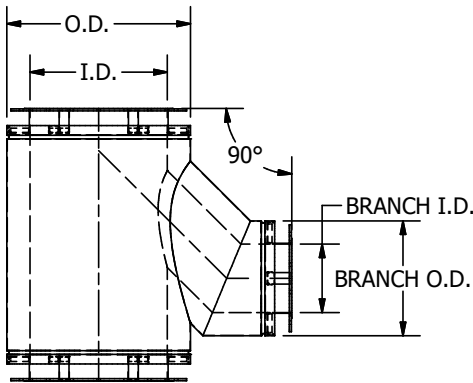

SYSTEM COMPONENTS

CUSTOM DIMENSIONS ARE AVAILABLE TO SUIT YOUR NEEDS IN EVEN AND ODD SIZES.



REDUCING 90° TEE

PART NO. R90T

The Reducing 90° Tee is used to join horizontal and vertical sections of different sizes, as well as provide for a connection to drain or inspection fittings. Use either the Drain Tee Cap or the End Cap for the closure of the unused opening.

Specify the size of the branch required.

Includes one FGT gasket and one outer band for larger and smaller openings, and hardware.

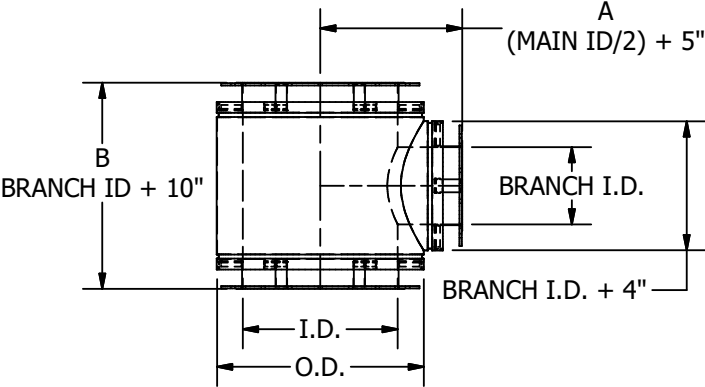

PART NO. R90T			
MAIN I.D.	A	BRANCH I.D.	B
6"	8"	5"	15"
7"	8 1/2"	6"	16"
8"	9"	7"	17"
9"	9 1/2"	8"	18"
10"	10"	9"	19"
11"	10 1/2"	10"	20"
12"	11"	11"	21"
13"	11 1/2"	12"	22"
14"	12"	13"	23"
15"	12 1/2"	14"	24"
16"	13"	15"	25"
17"	13 1/2"	16"	26"
18"	14"	17"	27"
19"	14 1/2"	18"	28"
20"	15"	19"	29"
21"	15 1/2"	20"	30"
22"	16"	21"	31"
23"	16 1/2"	22"	32"
24"	17"	23"	33"
25"	17 1/2"	24"	34"
26"	18"	25"	35"
27"	18 1/2"	26"	36"
28"	19"	27"	37"
29"	19 1/2"	28"	38"
30"	20"	29"	39"
31"	20 1/2"	30"	40"
32"	21"	31"	41"
33"	21 1/2"	32"	42"
34"	22"	33"	43"
35"	22 1/2"	34"	44"
36"	23"	35"	45"
37"	23 1/2"	36"	46"
38"	24"	37"	47"
39"	24 1/2"	38"	48"
40"	25"	39"	49"
41"	25 1/2"	40"	50"
42"	26"	41"	51"
43"	26 1/2"	42"	52"
44"	27"	43"	53"
45"	27 1/2"	44"	54"
46"	28"	45"	55"
47"	29 1/2"	46"	56"
48"	29"	47"	57"

SYSTEM COMPONENTS


CUSTOM DIMENSIONS ARE AVAILABLE TO SUIT YOUR NEEDS IN EVEN AND ODD SIZES.

ORIGINAL REDUCING 90° TEE

PART NO. OR90T

The Original Reducing 90° Tee is used to join horizontal and vertical sections of different sizes, as well as provide for a connection to drain or inspection fittings. Use either the drain tee cap or the end cap for the closure of the unused opening. Specify the size of the branch required.

Includes one FGT gasket and one outer band for larger and smaller openings, and hardware.

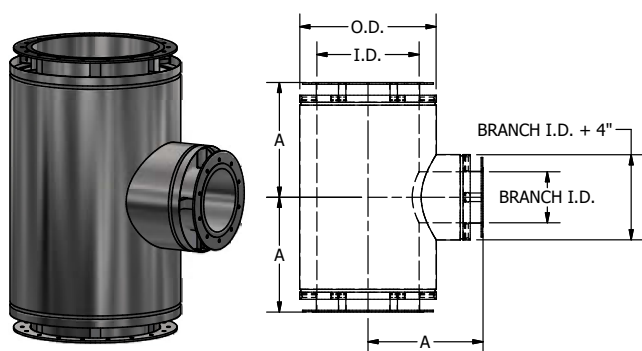


PART NO. OR90T	
I.D.	A
6"	10 1/2"
8"	11 1/2"
10"	12 1/2"
12"	13 1/2"
14"	14 1/2"
16"	15 1/2"
18"	16 1/2"
20"	17 1/2"
22"	18 1/2"
24"	19 1/2"
26"	20 1/2"
28"	21 1/2"
30"	22 1/2"
32"	23 1/2"
34"	24 1/2"
36"	25 1/2"
38"	26 1/2"
40"	27 1/2"
42"	28 1/2"
44"	29 1/2"
46"	30 1/2"
48"	31 1/2"

90° WYE

PART NO. 90Y

The 90° Wye is used for joining runs where low flow resistance is desired. All openings must be the same size. For connections to smaller diameter sections, use the tapered increasers.

Includes two FGT gaskets, two outer bands and hardware.

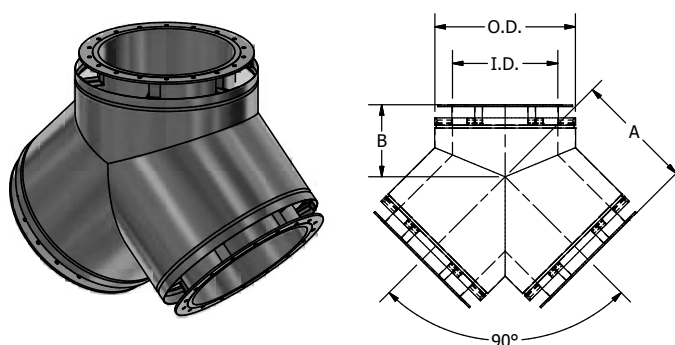

PART NO. 90Y		
I.D.	A	B
5-6"	10 1/2"	7"
7-8"	11 1/2"	7 13/32"
9-10"	12 1/2"	7 13/16"
11-12"	13 1/2"	8 7/32"
13-14"	14 1/2"	8 5/8"
15-16"	15 1/2"	9 1/16"
17-18"	16 1/2"	9 7/16"
19-20"	17 1/2"	9 7/8"
21-22"	18 1/2"	10 9/32"
23-24"	19 1/2"	10 23/32"
25-26"	20 1/2"	11 1/8"
27-28"	21 1/2"	11 17/32"
29-30"	22 1/2"	11 31/32"
31-32"	23 1/2"	12 3/8"
33-34"	24 1/2"	12 25/32"
35-36"	25 1/2"	13 3/16"
37-38"	26 1/2"	13 11/16"
39-40"	27 1/2"	14 1/32"
41-42"	28 1/2"	14 15/32"
43-44"	29 1/2"	14 27/32"
45-46"	30 1/2"	15 1/4"
47-48"	31 1/2"	15 11/16"


SYSTEM COMPONENTS

CUSTOM DIMENSIONS ARE AVAILABLE TO SUIT YOUR NEEDS IN EVEN AND ODD SIZES.

90° ELBOW PART NO. 90L

The 90° Elbow is used when making a 90° directional change. The 90° Elbow is available in sizes 5" to 24". For a 90° directional change in diameters from 25" to 48", use two 45° Elbows.

Includes one FGT gasket, one outer band and hardware.

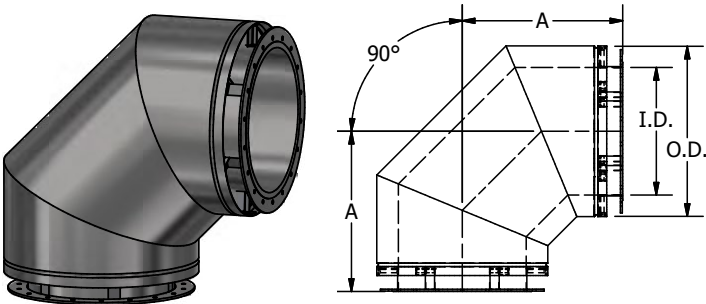


PART NO. 90L	
I.D.	A
6"	11 7/16"
8"	12 11/16"
10"	13 7/8"
12"	15 1/16"
14"	15 11/16"
16"	16 7/8"
18"	17 1/2"
20"	18 11/16"
22"	19 15/16"
24"	20 1/2"

ORIGINAL 90° ELBOW PART NO. 090L

The Original 90° Elbow is used when making a 90° directional change. The 90° Elbow is available in sizes 5" to 24". For a 90° directional change in diameters from 25" to 48", use two 45° Elbows.

Includes one FGT gasket, one outer band and hardware.

Note: The Original 90° Elbow is a long sweep/large radius elbow compared to the 90° Elbow.

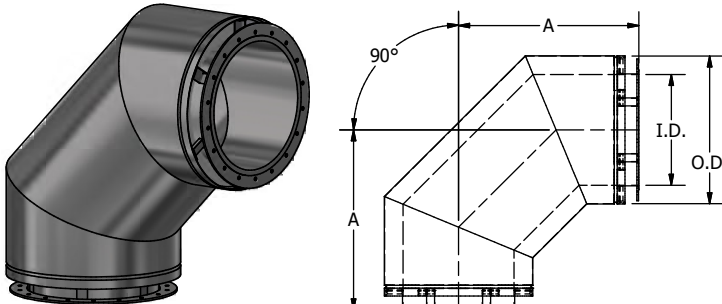

PART NO. 090L	
I.D.	A
6"	13 1/2"
8"	15 1/2"
10"	17 1/2"
12"	19 1/2"
14"	21 1/2"
16"	23 1/2"
18"	25 1/2"
20"	27 1/2"
22"	29 1/2"
24"	31 1/2"

SYSTEM COMPONENTS


CUSTOM DIMENSIONS ARE AVAILABLE TO SUIT YOUR NEEDS IN EVEN AND ODD SIZES.

45° ELBOW

PART NO. 45L

The 45° Elbow is used when a vertical or horizontal direction change of 45° is desired.

Includes one FGT gasket, one outer band and hardware.

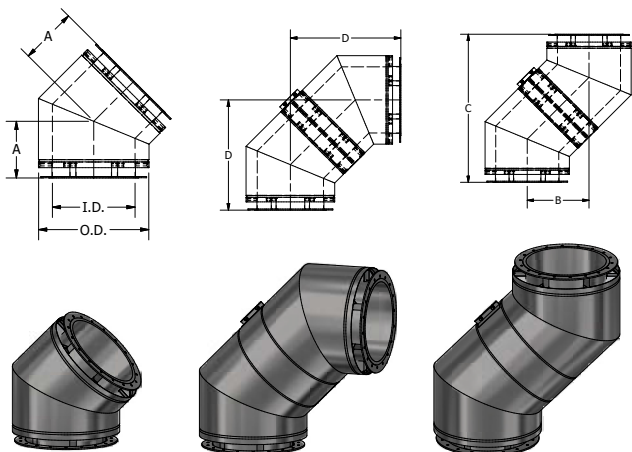

PART NO. 45L


I.D.	A	B	C	D
5-6"	7"	9 29/32"	23 29/32"	16 29/32"
7-8"	7 3/8"	10 7/16"	25 3/16"	17 13/16"
9-10"	7 13/16"	11 3/64"	26 43/64"	18 55/64"
11-12"	8 1/4"	11 43/64"	28 11/64"	19 59/64"
13-14"	8 5/8"	12 13/64"	29 29/64"	20 53/64"
15-16"	9 1/16"	12 13/16"	30 15/16"	21 7/8"
17-18"	9 1/2"	13 7/16"	32 7/16"	22 15/16"
19-20"	9 7/8"	13 31/32"	33 23/32"	23 27/32"
21-22"	10 5/16"	14 37/64"	35 13/64"	24 57/64"
23-24"	10 3/4"	15 13/64"	36 45/64"	25 61/64"
25-26"	11 1/8"	15 47/64"	37 63/64"	26 55/64"
27-28"	11 9/16"	16 23/64"	39 31/64"	27 59/64"
29-30"	11 15/16"	16 7/8"	40 3/4"	28 13/16"
31-32"	12 3/8"	17 1/2"	42 1/4"	29 7/8"
33-34"	12 3/4"	18 1/32"	43 17/32"	30 25/32"
35-36"	13 3/16"	18 21/32"	45 1/32"	31 27/32"
37-38"	13 5/8"	19 17/64"	46 33/64"	32 57/64"
39-40"	14"	19 51/64"	47 51/64"	33 51/64"
41-42"	14 7/16"	20 27/64"	49 19/64"	34 55/64"
43-44"	14 7/8"	21 1/32"	50 25/32"	35 29/64"
45-46"	15 1/4"	21 9/16"	52 1/16"	36 13/16"
47-48"	15 11/16"	22 3/16"	53 9/16"	37 7/8"

30° ELBOW

PART NO. 30L

The 30° Elbow is used when a vertical or horizontal direction change of 30° is desired.

Includes one FGT gasket, one outer band and hardware.

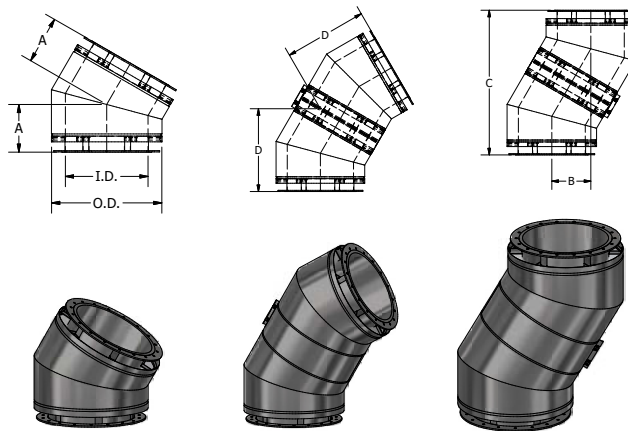

PART NO. 30L

I.D.	A	B	C	D
5-6"	6 1/8"	6 1/8"	22 55/64"	13 13/64"
7-8"	6 3/8"	6 3/8"	23 51/64"	13 47/64"
9-10"	6 5/8"	6 5/8"	24 23/32"	14 9/32"
11-12"	6 15/16"	6 15/16"	25 57/64"	14 61/64"
13-14"	7 3/16"	7 3/16"	26 53/64"	15 31/64"
15-16"	7 7/16"	7 7/16"	27 3/4"	16 1/32"
17-18"	7 3/4"	7 3/4"	28 59/64"	16 45/64"
19-20"	8"	8"	29 55/64"	17 15/64"
21-22"	8 1/4"	8 1/4"	30 51/64"	17 23/32"
23-24"	8 1/2"	8 1/2"	31 23/32"	18 5/16"
25-26"	8 3/4"	8 3/4"	32 21/32"	18 55/64"
27-28"	9 1/16"	9 1/16"	33 53/64"	19 17/32"
29-30"	9 5/16"	9 5/16"	34 3/4"	20 1/16"
31-32"	9 9/16"	9 9/16"	35 11/16"	20 39/64"
33-34"	9 7/8"	9 7/8"	36 55/64"	21 9/32"
35-36"	10 1/8"	10 1/8"	37 25/32"	21 13/16"
37-38"	10 3/8"	10 3/8"	38 23/32"	22 23/64"
39-40"	10 5/8"	10 5/8"	39 21/32"	22 57/64"
41-42"	10 15/16"	10 15/16"	40 13/16"	23 9/16"
43-44"	11 3/16"	11 3/16"	41 3/4"	24 7/64"
45-46"	11 1/2"	11 1/2"	42 59/64"	24 25/32"
47-48"	11 3/4"	11 3/4"	43 55/64"	25 5/16"


SYSTEM COMPONENTS

CUSTOM DIMENSIONS ARE AVAILABLE TO SUIT YOUR NEEDS IN EVEN AND ODD SIZES.

END CAP PART NO. EC

The End Cap is used to close an unused tee opening and to provide a means of accessing the interior of the system for inspection and cleaning.

Includes one FGT gasket and hardware.

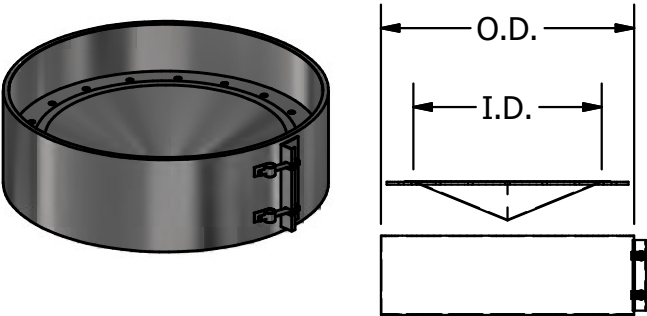


PART NO. EC	
I.D.	O.D.
6"	10"
8"	12"
10"	14"
12"	16"
14"	18"
16"	20"
18"	22"
20"	24"
22"	26"
24"	28"
26"	30"
28"	32"
30"	34"
32"	36"
34"	38"
36"	40"
38"	42"
40"	44"
42"	46"
44"	48"
46"	50"
48"	52"

DRAIN TEE CAP PART NO. DTC

The Drain Tee Cap is used to close an unused tee opening and to provide a drain at the base of a vertical chimney.

Includes one FGT gasket and hardware.

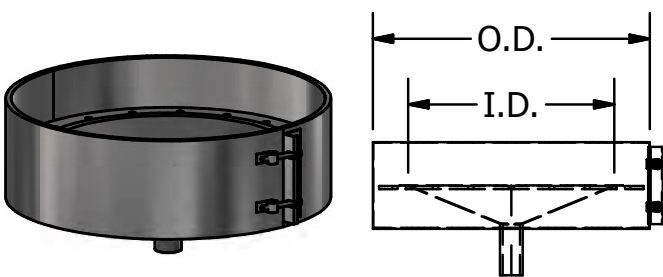

PART NO. DTC	
I.D.	O.D.
6"	10"
8"	12"
10"	14"
12"	16"
14"	18"
16"	20"
18"	22"
20"	24"
22"	26"
24"	28"
26"	30"
28"	32"
30"	34"
32"	36"
34"	38"
36"	40"
38"	42"
40"	44"
42"	46"
44"	48"
46"	50"
48"	52"

SYSTEM COMPONENTS


CUSTOM DIMENSIONS ARE AVAILABLE TO SUIT YOUR NEEDS IN EVEN AND ODD SIZES.

DRAIN SECTION

PART NO. DS

The Drain Section is used to drain rainwater and condensation from within the stack. The NPT nipple should be connected to a suitable drain.

Includes one FGT gasket, one outer band and hardware.

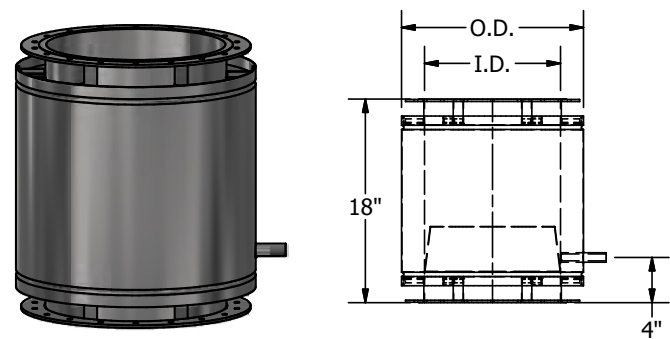


PART NO. DS	
I.D.	O.D.
6"	10"
8"	12"
10"	14"
12"	16"
14"	18"
16"	20"
18"	22"
20"	24"
22"	26"
24"	28"
26"	30"
28"	32"
30"	34"
32"	36"
34"	38"
36"	40"
38"	42"
40"	44"
42"	46"
44"	48"
46"	50"
48"	52"

HORIZONTAL DRAIN

PART NO. HD

The Horizontal Drain is used to drain rainwater and condensation from within the stack. The NPT nipple should be connected to a suitable drain.

Includes one FGT gasket, one outer band and hardware.

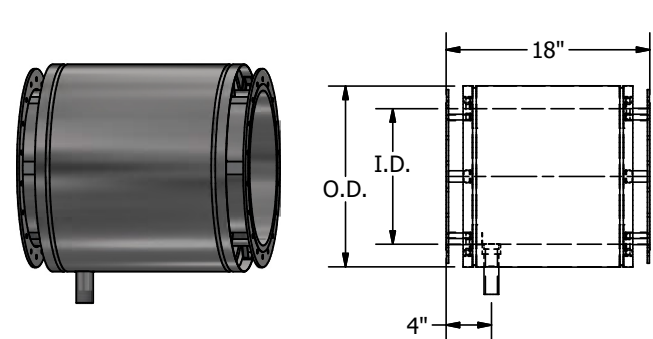

PART NO. HD	
I.D.	O.D.
6"	10"
8"	12"
10"	14"
12"	16"
14"	18"
16"	20"
18"	22"
20"	24"
22"	26"
24"	28"
26"	30"
28"	32"
30"	34"
32"	36"
34"	38"
36"	40"
38"	42"
40"	44"
42"	46"
44"	48"
46"	50"
48"	52"

SYSTEM COMPONENTS


CUSTOM DIMENSIONS ARE AVAILABLE TO SUIT YOUR NEEDS IN EVEN AND ODD SIZES.

BASE DRAIN SECTION

PART NO. BD

The Base Drain Section provides a bottom closure and a drain attachment for base-supported chimneys.

Includes one FGT gasket, one outer band and hardware.

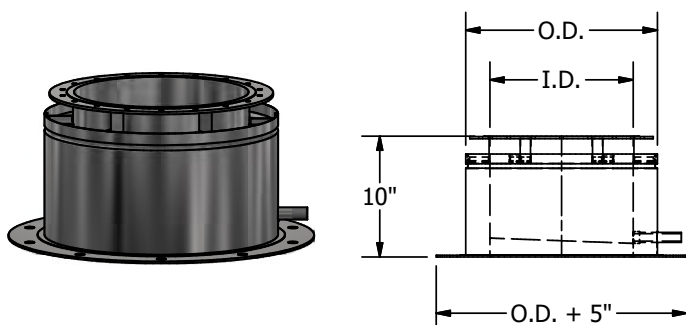


PART NO. BD	
I.D.	O.D.
6"	10"
8"	12"
10"	14"
12"	16"
14"	18"
16"	20"
18"	22"
20"	24"
22"	26"
24"	28"
26"	30"
28"	32"
30"	34"
32"	36"
34"	38"
36"	40"
38"	42"
40"	44"
42"	46"
44"	48"
46"	50"
48"	52"

FLASHING

PART NO. FL

The Flashing is used in conjunction with the rain collar to seal roof penetrations. This part is designed for flat roofs.


Custom-pitched flashings are available upon request.

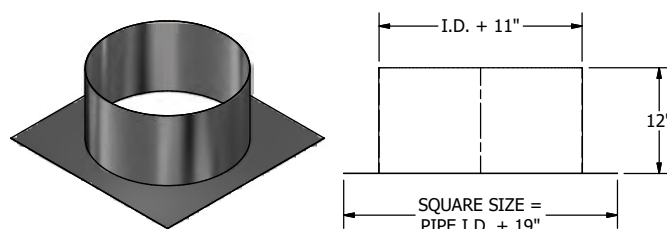

RAIN COLLAR

PART NO. RC


The Rain Collar is used in conjunction with the flashing to seal roof penetrations.

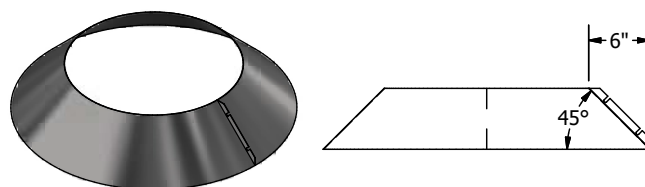

INSULATED THIMBLE

PART NO. IT

The Insulated Thimble is used when penetrating a combustible wall or roof. This part is designed for flat roofs. Custom-pitched thimbles are available upon request.

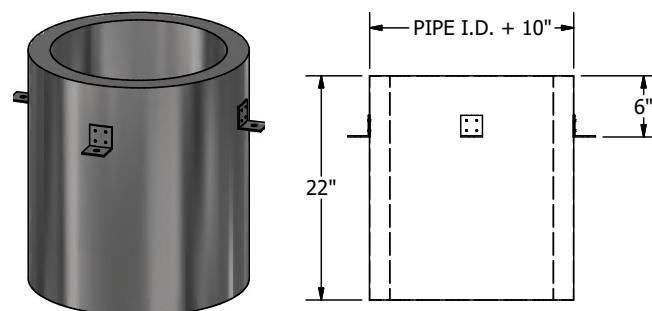

SYSTEM COMPONENTS


CUSTOM DIMENSIONS ARE AVAILABLE TO SUIT YOUR NEEDS IN EVEN AND ODD SIZES.

RAIN CAP

PART NO. CC

The Rain Cap is used at stack terminations to prevent rainwater from entering the flue. A drain should be used at the base of the stacks to drain off water that may be blown into the flue.

Includes one FGT gasket, hardware and one closure ring to seal the outer shell joint.

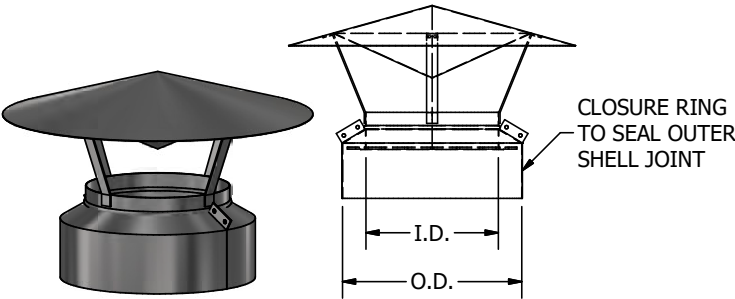


PART NO. CC	
I.D.	O.D.
6"	10"
8"	12"
10"	14"
12"	16"
14"	18"
16"	20"
18"	22"
20"	24"
22"	26"
24"	28"
26"	30"
28"	32"
30"	34"
32"	36"
34"	38"
36"	40"
38"	42"
40"	44"
42"	46"
44"	48"
46"	50"
48"	52"

TOP SECTION

PART NO. TS

The top section is used to protect the insulating space between the inner and outer shells when an open termination is required. A drain should be used at the base of the stack to drain off water that enters the system.

Includes one FGT gasket, hardware and one closure ring to seal the outer shell joint.

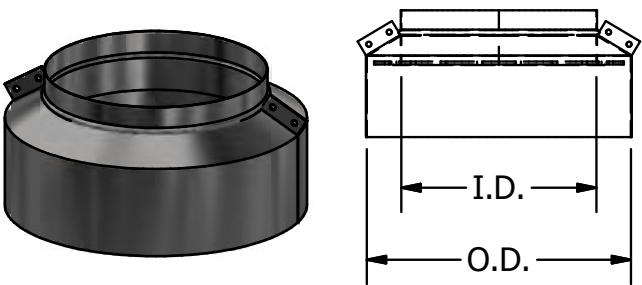

PART NO. TS	
I.D.	O.D.
6"	10"
8"	12"
10"	14"
12"	16"
14"	18"
16"	20"
18"	22"
20"	24"
22"	26"
24"	28"
26"	30"
28"	32"
30"	34"
32"	36"
34"	38"
36"	40"
38"	42"
40"	44"
42"	46"
44"	48"
46"	50"
48"	52"

SYSTEM COMPONENTS


CUSTOM DIMENSIONS ARE AVAILABLE TO SUIT YOUR NEEDS IN EVEN AND ODD SIZES.

FLIP TOP CAP

PART NO. FTC

The Flip Top Cap is used in generator systems when the cap remains closed until pressure opens the cap.

Includes one FGT gasket, hardware and one closure ring to seal the outer shell joint.

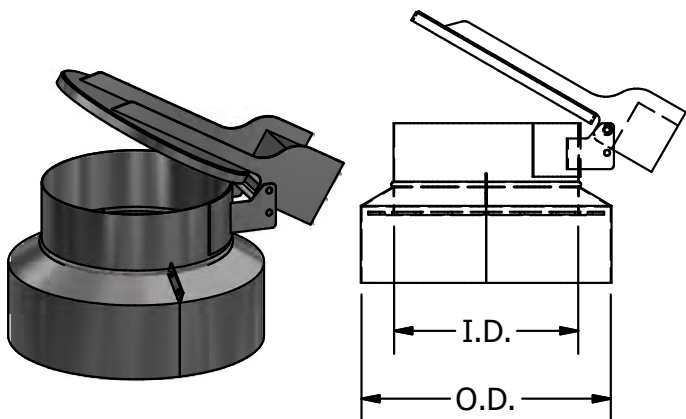


PART NO. FTC	
I.D.	O.D.
6"	10 1/4"
8"	12 1/4"
10"	14 1/4"
12"	16 1/4"
14"	18 1/4"
16"	20 1/4"
18"	22 1/4"
20"	24 1/4"
22"	26 1/4"
24"	28 1/4"
26"	30 1/4"
28"	32 1/4"
30"	34 1/4"
32"	36 1/4"
34"	38 1/4"
36"	40 1/4"
38"	42 1/4"
40"	44 1/4"
42"	46 1/4"
44"	48 1/4"
46"	50 1/4"
48"	52 1/4"

EXIT CONE

PART NO. EXC

The Exit Cone is used to increase the flue gas velocity exiting the stack. A drain should be used at the base of the stacks to remove any water that enters the stack.

Includes one FGT gasket, hardware and one closure ring to seal the outer shell joint.

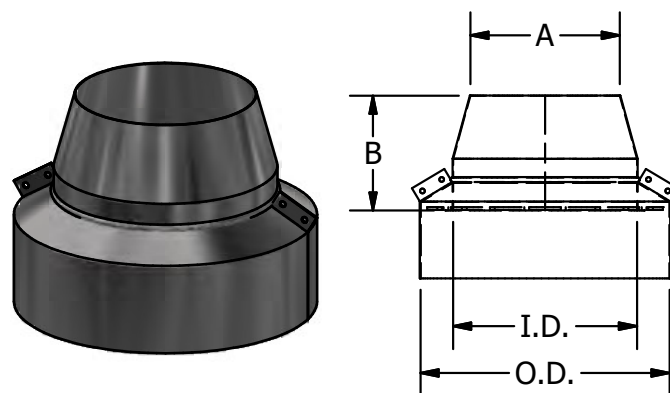

PART NO. EXC		
I.D.	A	B
6"	4 7/8"	5 3/8"
8"	6 1/2"	6 1/8"
10"	8 1/8"	6 3/4"
12"	9 3/4"	7 1/2"
14"	11 3/8"	8 1/8"
16"	13 1/8"	8 7/8"
18"	14 3/4"	9 1/2"
20"	16 3/8"	10 1/4"
22"	18"	10 7/8"
24"	19 5/8"	11 5/8"
26"	21 1/4"	12 1/4"
28"	22 7/8"	13"
30"	24 1/2"	13 5/8"
32"	26 1/8"	14 3/8"
34"	27 3/4"	15"
36"	29 3/8"	15 3/4"
38"	31"	16 3/8"
40"	32 5/8"	17 1/8"
42"	34 1/4"	17 3/4"
44"	35 7/8"	18 1/2"
46"	37 1/2"	19 1/8"
48"	39 1/4"	19 3/4"

SYSTEM COMPONENTS


CUSTOM DIMENSIONS ARE AVAILABLE TO SUIT YOUR NEEDS IN EVEN AND ODD SIZES.

HORIZONTAL TERMINATION

PART NO. HT

The Horizontal Termination is used when the stack terminates in a horizontal position. Bird screen covers the opening to prevent any birds or rodents from entering.

Includes one FGT gasket, one outer band and hardware.

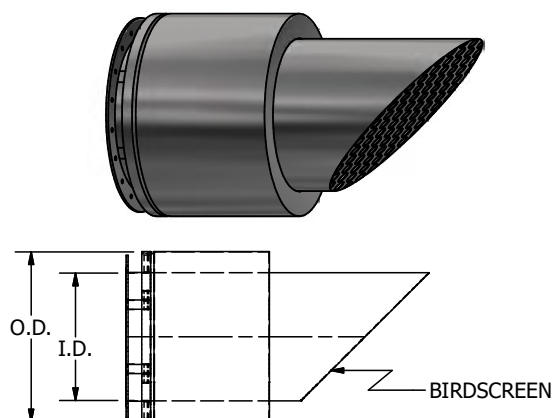


PART NO. HT	
I.D.	O.D.
6"	10"
8"	12"
10"	14"
12"	16"
14"	18"
16"	20"
18"	22"
20"	24"
22"	26"
24"	28"
26"	30"
28"	32"
30"	34"
32"	36"
34"	38"
36"	40"
38"	42"
40"	44"
42"	46"
44"	48"
46"	50"
48"	52"

GUY SECTION

PART NO. GS

The Guy Section is to be used when the chimney extends beyond the vertical limits above the roof line. The guy section should be connected to guy wires or a rigid guying structure. The guy section is made up of one rounded guying plate welded to a 5 1/4" tube section.

Includes one FGT gasket, one outer band and hardware.

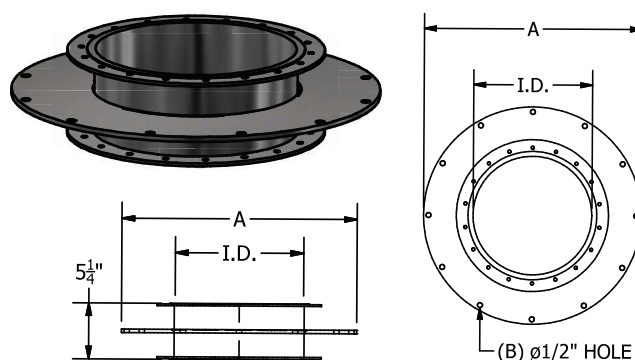

PART NO. GS		
I.D.	A	B
6"	15 3/16"	12
8"	17 3/16"	12
10"	19 3/16"	12
12"	21 3/16"	12
14"	23 3/16"	12
16"	25 3/16"	12
18"	27 3/16"	12
20"	30 3/16"	12
22"	32 3/16"	12
24"	34 3/16"	16
26"	36 3/16"	16
28"	38 3/16"	16
30"	40 3/16"	16
32"	42 3/16"	20
34"	44 3/16"	20
36"	46 3/16"	20
38"	48 3/16"	20
40"	50 3/16"	24
42"	52 3/16"	24
44"	54 3/16"	28
46"	56 3/16"	28
48"	58 3/16"	28

SYSTEM COMPONENTS


CUSTOM DIMENSIONS ARE AVAILABLE TO SUIT YOUR NEEDS IN EVEN AND ODD SIZES.

SUPPORT PLATE

PART NO. SP

The Support Plate is the primary load-carrying member of the chimney assembly. This part is designed to support (B) (see chart below) feet of vertical chimney section, as well as provide fixed points in breeching runs. The support plate is made up of one plate welded to a 5 1/4" tube section.

Includes one FGT gasket, one outer band and hardware.

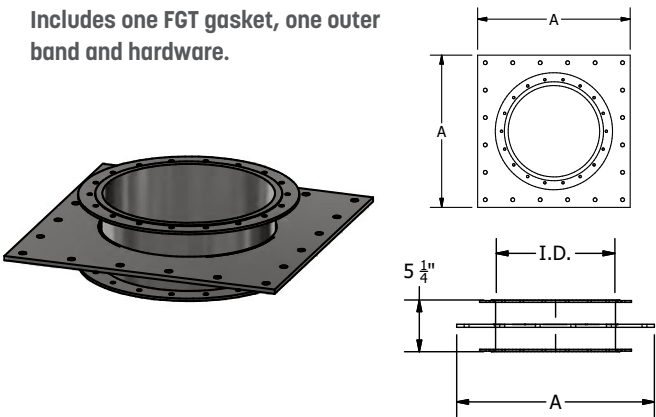


PART NO. SP		
I.D.	A	B (FT)
6"	14"	350'
8"	16"	338'
10"	18"	327'
12"	20"	315'
14"	22"	303'
16"	24"	292'
18"	26"	280'
20"	28"	268'
22"	30"	256'
24"	32"	245'
26"	34"	233'
28"	36"	221'
30"	38"	210'
32"	40"	198'
34"	42"	186'
36"	44"	175'
38"	46"	163'
40"	48"	151'
42"	50"	139'
44"	52"	128'
46"	54"	116'
48"	56"	104'

WALL SUPPORT

PART NO. WS

The Wall Support is used to provide chimney support along a wall. The wall support will maintain the required clearance to combustible structures when properly installed and can support (C) (see chart below) feet of vertical chimney. The wall support is made up of one plate welded to a 5 1/4" tube section with two brackets.

Includes one FGT gasket, one outer band and hardware.

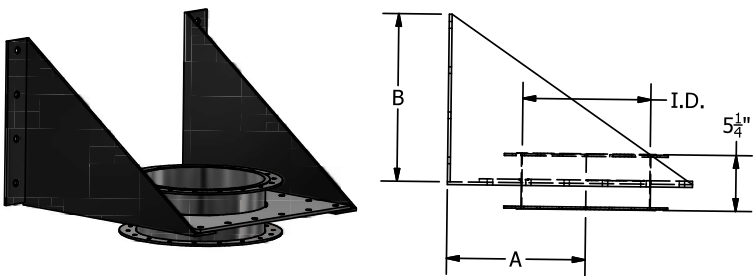

PART NO. WS			
MAIN ID	A	B	C (FT)
5-6"	8"	10 5/16"	171'
7-8"	9"	12 5/8"	156'
9-10"	11"	13 11/16"	147'
11-12"	12"	15 1/16"	138'
13-14"	13"	16 3/8"	132'
15-16"	14"	17 3/4"	127'
17-18"	16"	19 3/4"	120'
19-20"	17"	21 7/16"	116'
21-22"	19"	23 1/2"	111'
23-24"	20"	24 13/16"	107'
25-26"	22"	26 13/16"	103'
27-28"	23"	28 3/16"	97'
29-30"	25"	30 3/16"	93'
31-32"	26"	31 9/16"	108'
33-34"	28"	33 9/16"	102'
35-36"	29"	34 7/8"	80'
37-38"	31"	36 7/8"	75'
39-40"	32"	38 1/4"	71'
41-42"	36"	41 5/8"	67'
43-44"	37"	42 15/16"	63'
45-46"	38"	44 5/16"	59'
47-48"	39"	45 5/8"	56'


SYSTEM COMPONENTS

CUSTOM DIMENSIONS ARE AVAILABLE TO SUIT YOUR NEEDS IN EVEN AND ODD SIZES.

FLOOR/ROOF GUIDE

PART NO. FRG

The Floor/Roof Guide is used at the penetration of floors and roofs to guide the chimney. This part is designed to absorb lateral loads only. It will not support vertical chimney sections.

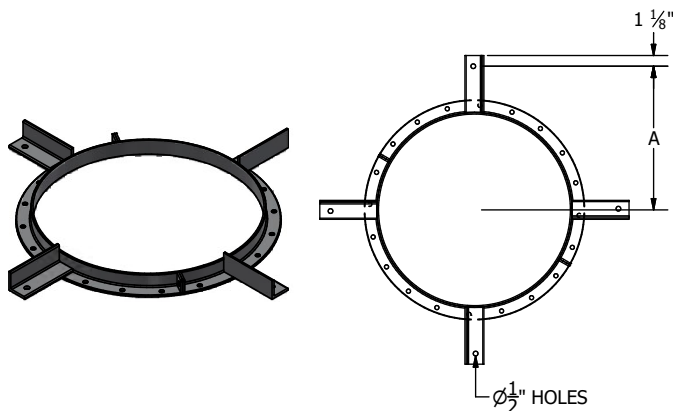


PART NO. FRG	
I.D.	A
6"	10 1/8"
8"	11 1/8"
10"	12 1/8"
12"	13 3/16"
14"	14 3/16"
16"	15 3/16"
18"	16 3/16"
20"	17 3/16"
22"	18 3/16"
24"	19 3/16"
26"	20 3/16"
28"	21 3/16"
30"	22 3/16"
32"	23 3/16"
34"	24 3/16"
36"	25 3/16"
38"	26 3/16"
40"	27 3/16"
42"	28 3/16"
44"	29 3/16"
46"	30 3/16"
48"	31 3/16"

WALL GUIDE

PART NO. WG

The Wall Guide is used to guide long vertical runs placed adjacent to walls. This part will maintain proper clearance to combustibles when properly installed.

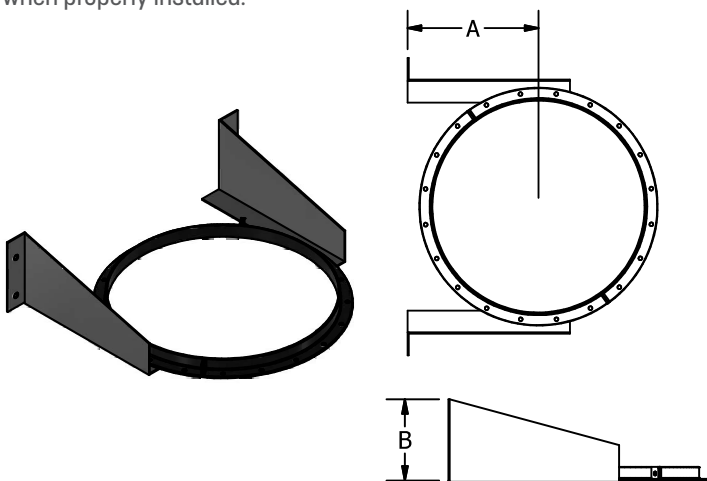

PART NO. WG		
I.D.	A	B
5-6"	8"	7"
7-8"	10"	7 5/8"
9-10"	11"	7 13/16"
11-12"	12"	8 1/8"
13-14"	13"	8 3/8"
15-16"	14"	8 5/8"
17-18"	16"	9 1/4"
19-20"	17"	9 7/16"
21-22"	19"	10"
23-24"	20"	10 1/4"
25-26"	22"	10 13/16"
27-28"	23"	11 1/6"
29-30"	25"	11 5/8"
31-32"	26"	11 13/16"
33-34"	28"	12 7/16"
35-36"	29"	12 5/8"
37-38"	31"	13 3/16"
39-40"	32"	13 7/16"
41-42"	36"	14 1/2"
43-44"	37"	14 3/4"
45-46"	38"	15 1/16"
47-48"	39"	15 5/16"


SYSTEM COMPONENTS

CUSTOM DIMENSIONS ARE AVAILABLE TO SUIT YOUR NEEDS IN EVEN AND ODD SIZES.

FULL RING

PART NO. FR

The Full Ring is used to guide horizontal and vertical runs. The part is simply bolted around the outer shell, then rigidly connected to the building structure.

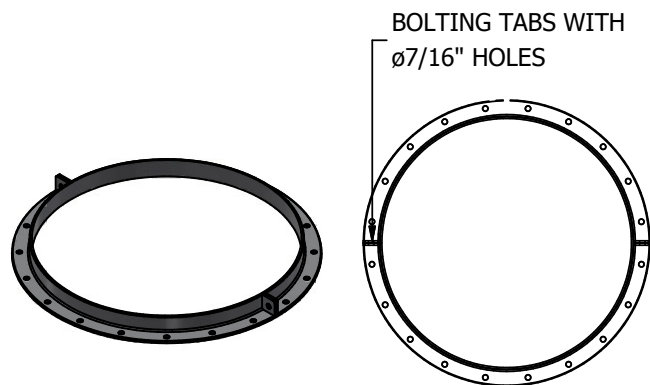


PRESSURE RELIEF VALVE

PART NO. PRV

The Pressure Relief Valve is used in generator exhaust systems to prevent damage resulting in the ignition of unburned fuel. This component complies with NFPA 37.

Valves are set to 1 PSI.


Includes one FGT gasket, one seal ring and hardware.

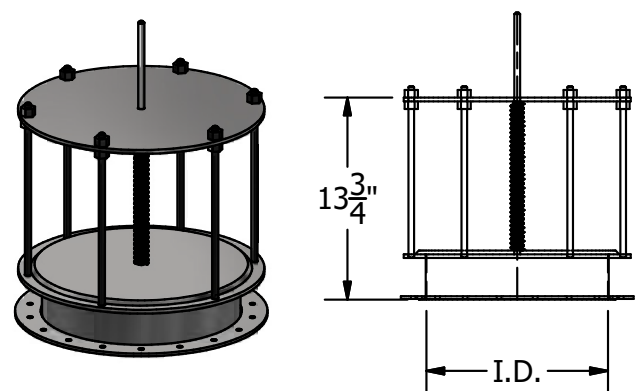

HANGER

PART NO. HG

The Hanger is used to support long horizontal runs, placed under the flue and then supported by rods connecting to the building structure.

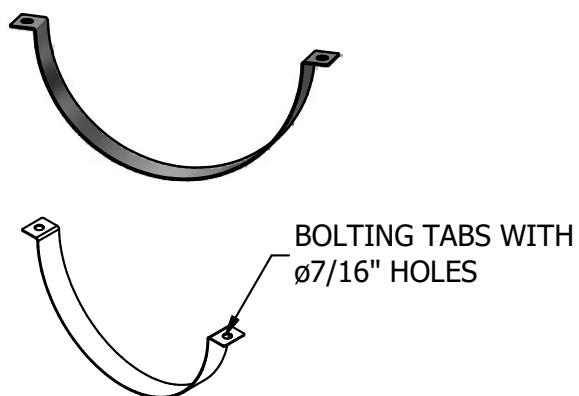


SYSTEM COMPONENTS


CUSTOM DIMENSIONS ARE AVAILABLE TO SUIT YOUR NEEDS IN EVEN AND ODD SIZES.

SQUARE-TO-ROUND TRANSITIONS

The Square-to-Round Transitions are used when connecting to appliances with square or rectangular outlets. The base can be raw for field welding or flanged for field drilling and bolting.

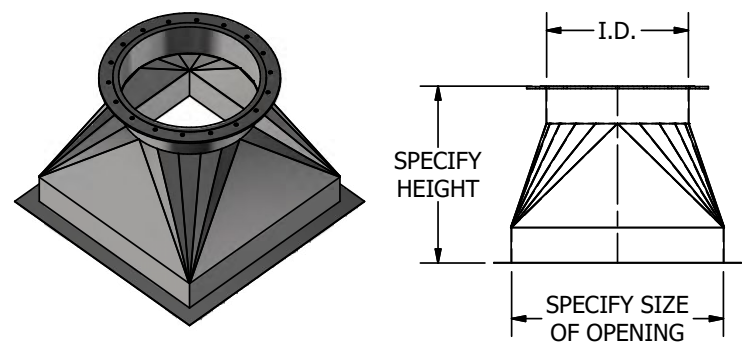

OUTER SHELL TEMP CHART

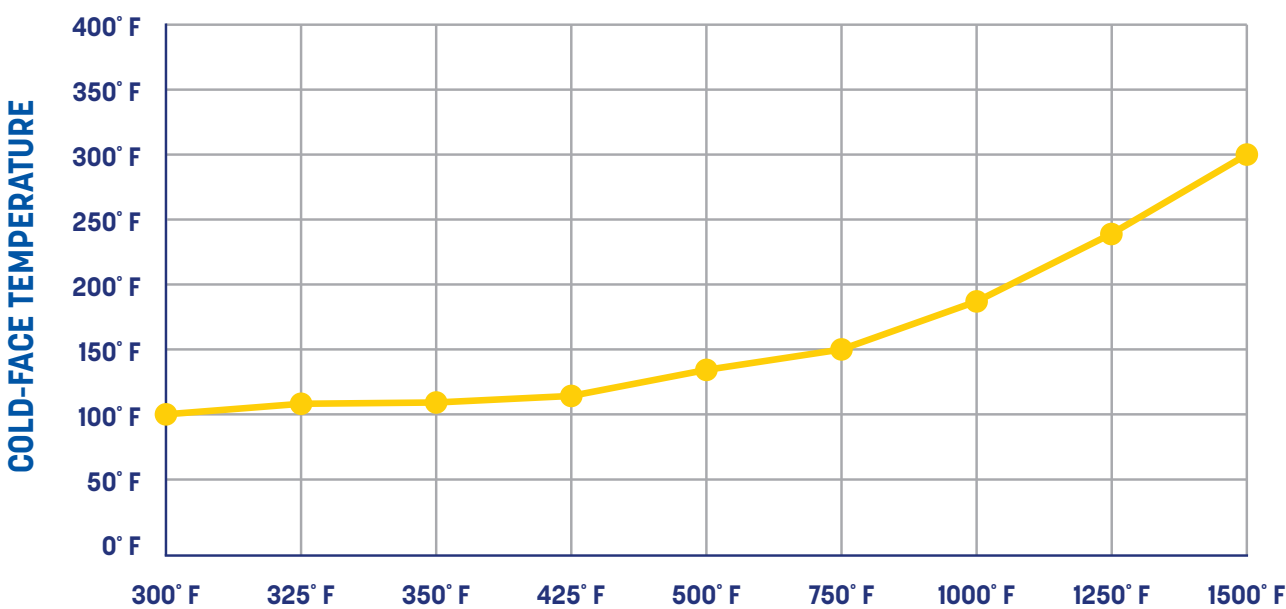

SYSTEM COMPONENTS

CUSTOM DIMENSIONS ARE AVAILABLE TO SUIT YOUR NEEDS IN EVEN AND ODD SIZES.

CPRP2 WEIGHT CHART

INSIDE DIAMETER (INCHES)																							
Part Description	Part No.	6"	8"	10"	12"	14"	16"	18"	20"	22"	24"	26"	28"	30"	32"	34"	36"	38"	40"	42"	44"	46"	48"
29" Straight Section	29S	24 lbs.	29	34	39	44	49	54	59	64	69	74	79	84	107	113	119	142	149	156	163	170	176
30 Degree Elbow	30L	12 lbs.	14	17	20	24	27	31	34	38	42	46	51	55	71	77	83	102	110	117	125	134	142
45 Degree Elbow	45L	13 lbs.	16	19	23	27	32	36	41	46	52	57	63	69	89	97	105	130	140	151	161	172	184
45 Degree Lateral Tee	45LT	29 lbs.	38	48	60	73	87	102	118	136	155	175	196	219	294	324	355	434	472	512	554	597	642
47" Straight Section	47S	37 lbs.	44	52	60	68	76	83	91	99	107	115	122	130	167	176	185	220	230	241	252	262	273
59" Straight Section	59S	-	55	65	75	85	95	104	114	124	134	-	-	-	-	-	-	-	-	-	-	-	-
90 Degree Elbow	90L	19 lbs.	25	33	42	52	62	74	87	101	116	-	-	-	-	-	-	-	-	-	-	-	-
90 Degree Wye	90Y	20 lbs.	25	31	38	45	52	61	69	79	88	99	109	121	160	175	190	233	252	272	292	313	335
90 Degree Tee	90T	22 lbs.	29	36	43	51	60	70	80	90	102	114	126	139	185	202	221	269	291	314	338	363	388
Base Drain	BD	18 lbs.	21	24	28	31	34	37	41	44	47	51	54	57	66	69	73	85	89	93	97	101	105
Bellows Section	BS	19 lbs.	23	27	31	35	39	43	47	51	55	59	62	67	84	88	93	112	117	123	128	134	139
Boiler Kits	BKF, BKR	7 lbs.	9	10	12	14	15	17	19	20	22	23	25	27	28	30	32	40	42	44	46	48	50
Drain Section	DS	17 lbs.	20	24	27	31	34	38	41	44	47	51	54	57	66	69	73	85	89	93	97	101	105
Drain Tee Cap	DTC	6 lbs.	7	8	10	11	13	14	16	18	20	23	25	27	30	33	43	56	60	65	70	75	80
End Cap	EC	5 lbs.	6	7	9	10	12	13	15	17	19	22	24	26	29	32	42	55	59	64	69	74	79
Flashing	FL	11 lbs.	12	13	15	16	18	19	21	22	24	25	27	29	30	32	34	35	37	39	40	42	44
Floor/Roof Guide	FRG	11 lbs.	12	15	16	17	18	19	24	25	27	27	30	30	32	33	34	35	36	38	39	41	42
Full Ring	FR	5 lbs.	6	9	10	11	12	13	18	19	21	21	24	24	26	27	28	29	30	32	33	35	36
Guy Section	GS	16 lbs.	19	22	24	27	30	33	35	38	41	44	47	49	52	55	58	64	67	70	73	76	79
Hanger	HG	3 lbs.	3	5	5	6	6	7	9	10	11	11	12	12	13	14	14	15	15	16	17	18	18
Horizontal Drain	HD	17 lbs.	20	24	27	31	34	38	41	45	48	52	55	59	74	78	82	99	104	109	113	118	123
Nozzle Section	NS	17 lbs.	20	24	27	31	34	38	41	45	48	52	55	59	74	78	82	99	104	109	113	118	123
Rain Cap	CC	10 lbs.	13	15	18	21	24	27	30	34	37	41	45	49	56	61	69	78	84	91	98	105	111
Rain Collar	RC	5 lbs.	6	6	7	7	8	8	9	9	10	10	11	11	12	12	13	13	14	14	15	15	16
Support Plate	SP	31 lbs.	36	42	47	53	58	64	70	76	99	107	114	122	130	138	146	186	196	206	217	227	238
Tapered Increaser	TI	20 lbs.	24	28	32	36	40	44	48	53	57	61	65	69	87	92	96	116	122	128	133	139	144
Top Section	TS	5 lbs.	6	7	8	9	10	11	12	12	13	14	15	16	17	18	22	26	27	28	29	31	32
Wall Guide	WG	13 lbs.	16	20	22	24	27	30	36	40	42	45	48	51	53	57	60	64	64	73	75	78	81
Wall Support	WS	49 lbs.	60	70	81	92	103	118	132	149	179	199	215	236	254	277	295	350	372	412	435	459	482

All weights shown above are actual weights; for shipping weights, multiply by 1.25

SAMPLE SPECIFICATION

MODEL CPRP2

The factory-built, modular chimney shall be laboratory tested and listed in accordance with Underwriters Laboratories Standard UL 103 for factory-built chimneys for building heating appliances and UL 2561 for 1,400°F factory-built chimneys for use with building heating equipment burning gas, solid or liquid fuels with flue gases not exceeding 1,400°F under continuous operations and 1,800°F under intermittent operation for a 10-minute duration. Sections shall bear the UL listing mark for the United States and cUL listing mark for Canada. Sections shall be sealed with pressure and liquid tight high-temperature gaskets and hardware.

Inner shell material shall be type 304 stainless steel for natural gas and number 2 oil-fired appliances and type 316 stainless steel for coal, number 4 and number 6 oil-fired appliances. Inner shell thickness shall be 0.036" for 5" to 36" diameter systems and 0.048" for 37" to 48" diameter systems. All inner shell seams shall be full penetration welded the entire length of the pipe section. Riveted, tacked or spot-welded seams are not permitted.

Outer shell material shall be 430 stainless steel with a thickness of 0.028" for 5" to 36" diameter systems and 0.048" for 37" to 48" diameter systems. All outer shell seams shall be full penetration welded the entire length of the pipe section. Riveted, tacked or spot-welded seams are not permitted.

Between the inner and outer shells, there shall be a minimum of 2" of 1,600°F-rated low-conductivity ceramic fiber insulation. The insulation is to be securely attached to the inner shell with steel straps and insulating pins welded to the outer shell to maintain the 2" spacing and ensure concentricity of the shells.

Breeching and chimney sections, when installed according to the manufacturer's instructions, shall comply with national safety standards and building codes. Stacks terminating above a roof must terminate as required by code or NFPA 211.

REFLECTS

5-YEAR WARRANTY MODEL CPRP2 STANDARD

The Schebler Model CPRP2 Chimney, where installed according to manufacturer's installation instructions, is warranted by the Schebler Company for a period of five (5) years from the date of system start-up against defects in material and workmanship of the product for parts only. Any defective part in the product will, at Schebler's option, either be repaired or replaced. Should the part be returned, the owner must pay all transportation charges. The repaired or replacement part will, in turn, be shipped by Schebler to the owner, freight prepaid. The warranty on any repaired or replacement part shall be for a duration of time no longer than the remaining or unexpired term of the original warranty.

This warranty does not cover labor or other service charges incurred by the owner, nor any parts not manufactured by The Schebler Company, or any other components that are not part of the Model CPRP2 Chimney Systems.

This limited warranty is extended to the purchaser, subject to the satisfaction of the following conditions:

1. Generally accepted engineering practices have been followed to determine that sizing and material specifications are suitable for the application and environment involved.
2. The undamaged components have been correctly installed in accordance with the installation instructions published by The Schebler Company at the time of shipment.

The Schebler Company assumes no liability for incidental or consequential damages of any kind or for any damages resulting in whole or part from misuse, improper installation or inadequate maintenance of the system or component part thereof. This warranty is in lieu of all other express warranties or guarantees of any kind. All implied warranties, including merchantability and fitness, are limited to the duration of the express warranty contained herein. The Schebler Company neither assumes nor does it authorize any other person to assume on its behalf any other liability in connection with the sale of its products.

10-YEAR WARRANTY MODEL CPRP2 EXTENDED

The Schebler Company warrants owners of its Model CPRP2 Chimney against defects in material and workmanship in normal use for ten (10) years from the date of delivery to the construction site when installed, maintained and used as part of a Schebler Model CPRP2 Chimney System and in accordance with The Schebler Company specifications.

The Schebler Company further warrants any portion of the chimney system repaired or replaced under this warranty for the remainder of the original warranty period.

This warranty is limited to the repair or replacement of the product, plus shipping costs to the failure location. This warranty does not cover any labor costs for removal or replacement of the defective product, nor does this warranty cover any system components not furnished by The Schebler Company and installed as part of the system.

This limited warranty is extended to the purchaser, subject to the satisfaction of the following conditions:

1. System sizing and design has been performed by Schebler personnel and design parameters provided to The Schebler Company by the responsible engineer were and are accurately representative of the operating conditions.
2. The undamaged components have been correctly installed in accordance with system design and sizing as performed by Schebler and installation instructions published by The Schebler Company at the time of shipment.
3. Proper precautions have been taken to ensure that appliance air is free of solvent or refrigerant vapors or any halogenated compound which may cause acid condensate to form within the chimney.
4. The Schebler Company has supplied the entire chimney or exhaust system from the appliance outlet to the termination of the stack.
5. Prior to start-up and thereafter, exposed aluminized steel surfaces are protected with a minimum of one base coat of primer and one finish coat of heat-resistant paint at all times.

The Schebler Company assumes no liability for incidental or consequential damages of any kind or for any damages resulting in whole or part from misuse, improper installation or inadequate maintenance of the system or component part thereof. This warranty is in lieu of all other express warranties or guarantees of any kind. All implied warranties, including merchantability and fitness, are limited to the duration of the express warranty contained herein. The Schebler Company neither assumes nor does it authorize any other person to assume on its behalf any other liability in connection with the sale of its products.

Model CPRP2

ZERO-LEAK PRODUCTS FOR EXHAUST APPLICATIONS

The CPR Series zero-leak products are ideal for locations where safety is critical, including medical facilities, occupied mixed-use buildings, data centers or any large system with multiple appliances. CPRP2 products are UL 103 and UL 2561 listed.

All Schebler prefabricated chimney systems are known by the value they provide through unmatched dimensional accuracy and detailed draft calculations. These translate into fast project completion, lowered installation costs and satisfied customers.

With Schebler, we are certain you will find what thousands of our customers have found: we exceed expectations by providing high-quality products and services through a culture of empowerment, continuous improvement and innovation. Since our founding in 1895, we have fabricated high-quality, innovative products designed and built with expert craftsmanship and backed by impeccable support. Contact Schebler for more information about our chimney solutions, including help with custom engineering and design solutions.

Made in America by a Team of Dedicated Employee-Owners
FIND YOUR LOCAL SCHEBLER CHIMNEY SYSTEMS DISTRIBUTOR



5665 Fenno Rd.
Bettendorf, IA 52722

563.359.0110

scheblerchimney.com